






CONTENTS :

- PAGE1 - CONTENTS
- PAGE2 - POWER, MODULE, GPIO, JTAG
- PAGE3 - CSI, DSI, HDMI, USB

REVISION HISTORY:




- 23/01/2014 - V1.0
- 18/02/2014 - V1.1
- 03/04/2014 - V1.2 - Production Version

POWER IN

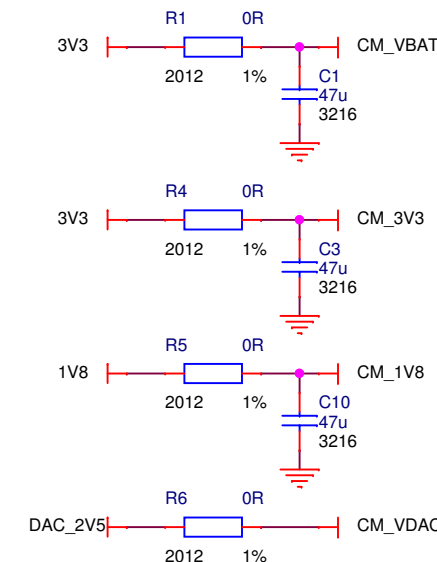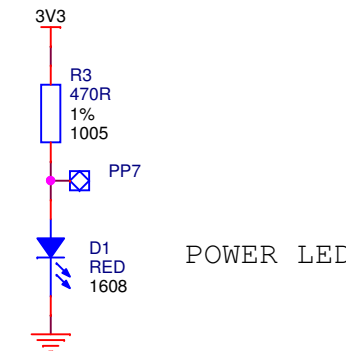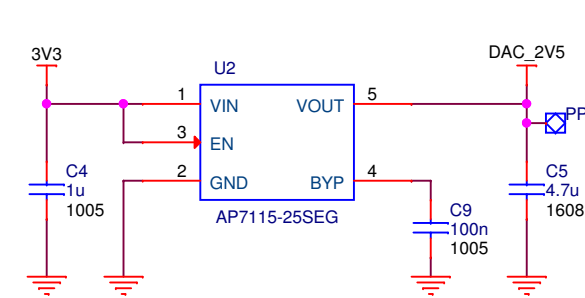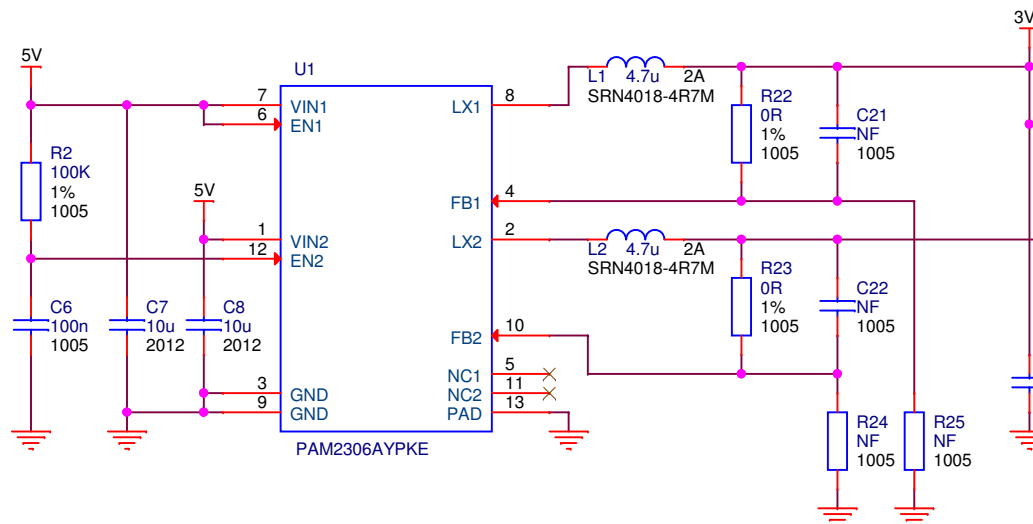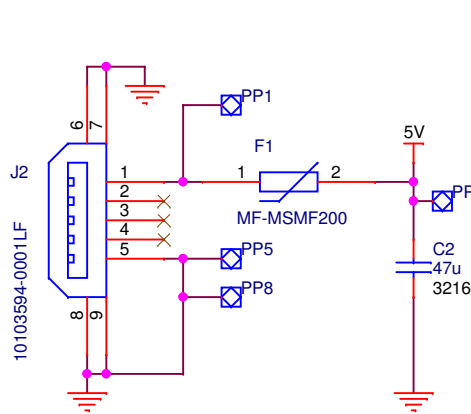

GPIO BANK 0/1 VOLTAGE SELECT:

Jumper Positions VG0 / VG1:
1-3 / 2-4 = 3V3
3-5 / 4-6 = 1V8
NC = external source

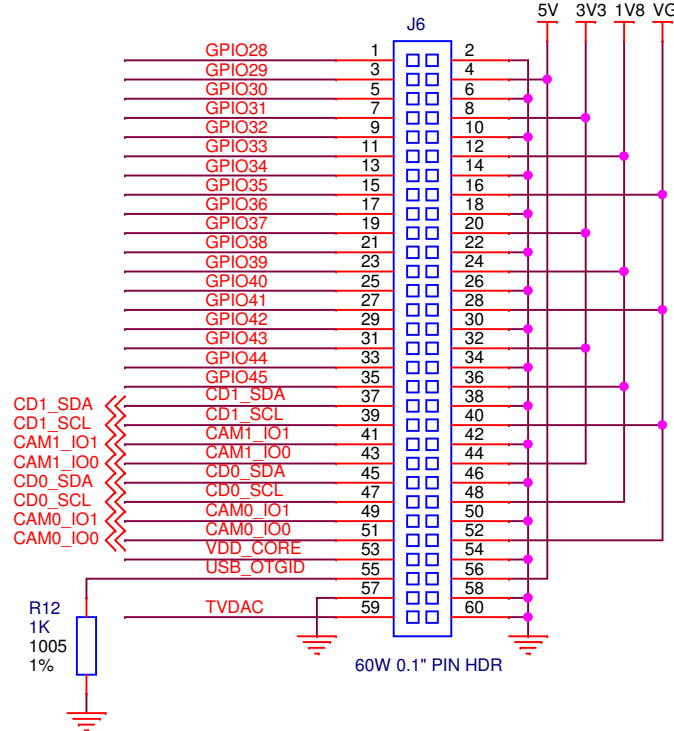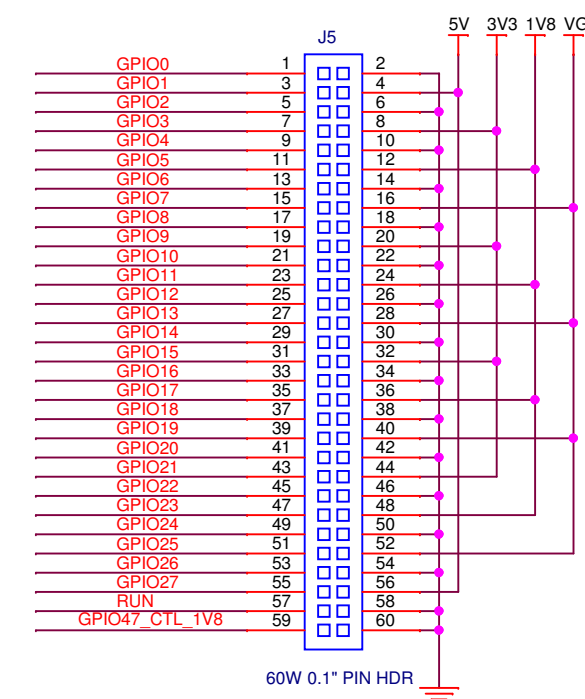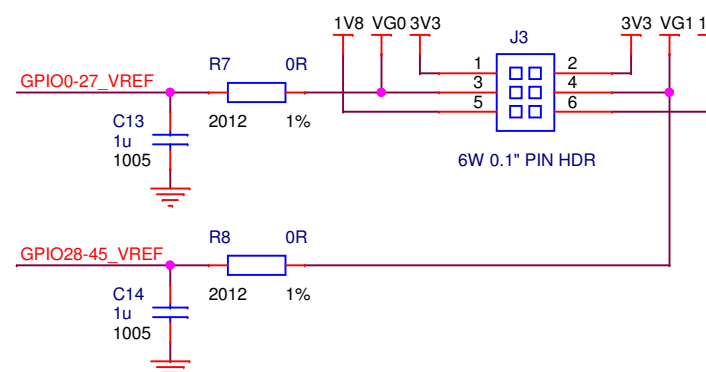

MODULE BOOT OPTIONS:


BCM2835 BootROM boot from USB:
- J4 set to enable USB boot
- Plug host into micro USB socket J15 (VBUSB=5V)
- GPIO47_1V8 high at boot (input with 50k pullup)
- EMMC_DISABLE_N therefore LOW
- On power up BCM2835 can't access eMMC so boots from USB
- Once booted, 2835 USB boot SW forces GPIO47_1V8 LOW to enable access to eMMC

BCM2835 BootROM boot from eMMC:
- Nothing plugged into micro USB socket J15 (VBUSB=0V)
OR J4 set to disable USB Boot
- EMMC_DISABLE_N therefore HIGH
- On power up BCM2835 boots from eMMC
- GPIO47_1V8 used as status LED


BCM2835 BootROM boot from eMMC with GPIO boot select:
- Set J4 to disable USB boot
- EMMC_DISABLE_N therefore always HIGH
- On power up BCM2835 boots from eMMC
- BCM2835 boot SW reads GPIO47_1V8 (GPIO47_CTL_1V8) if low perform 'alternate' boot (e.g. can boot into safe mode, or USB mass storage...)
- Once booted GPIO47_1V8 used as status LED

USB BOOT ENABLE:

Jumper Positions:
1-2 = USB BOOT ENABLED
2-3 = USB BOOT DISABLED

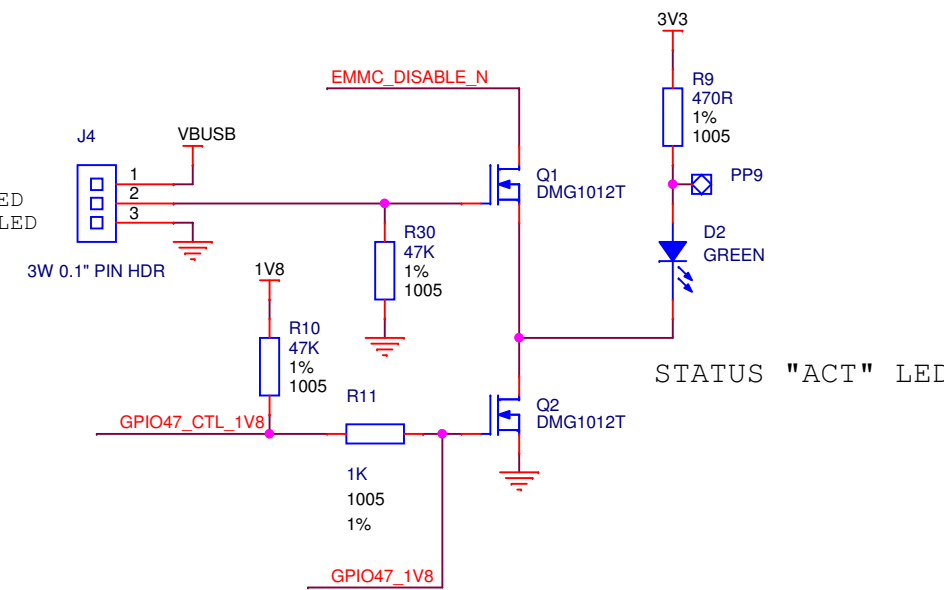









VIDEOCORE JTAG

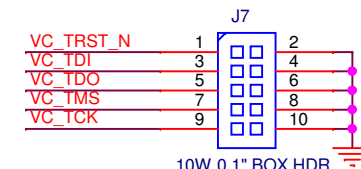

Route ringed signals as matched length 100R differential pairs

Route bold-ringed signals as matched length 90R differential pair

VDD_CORE used for module test only (do not use in normal operation, do not draw current from this pin!)

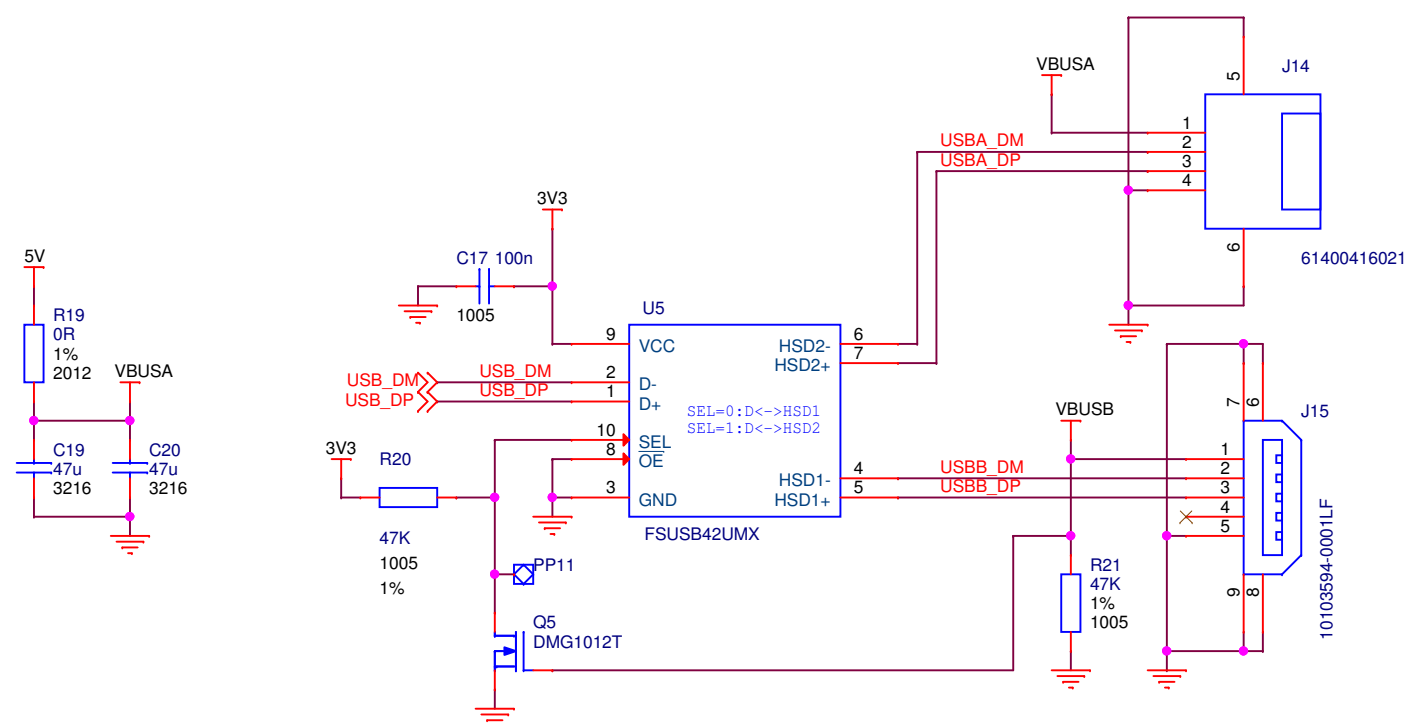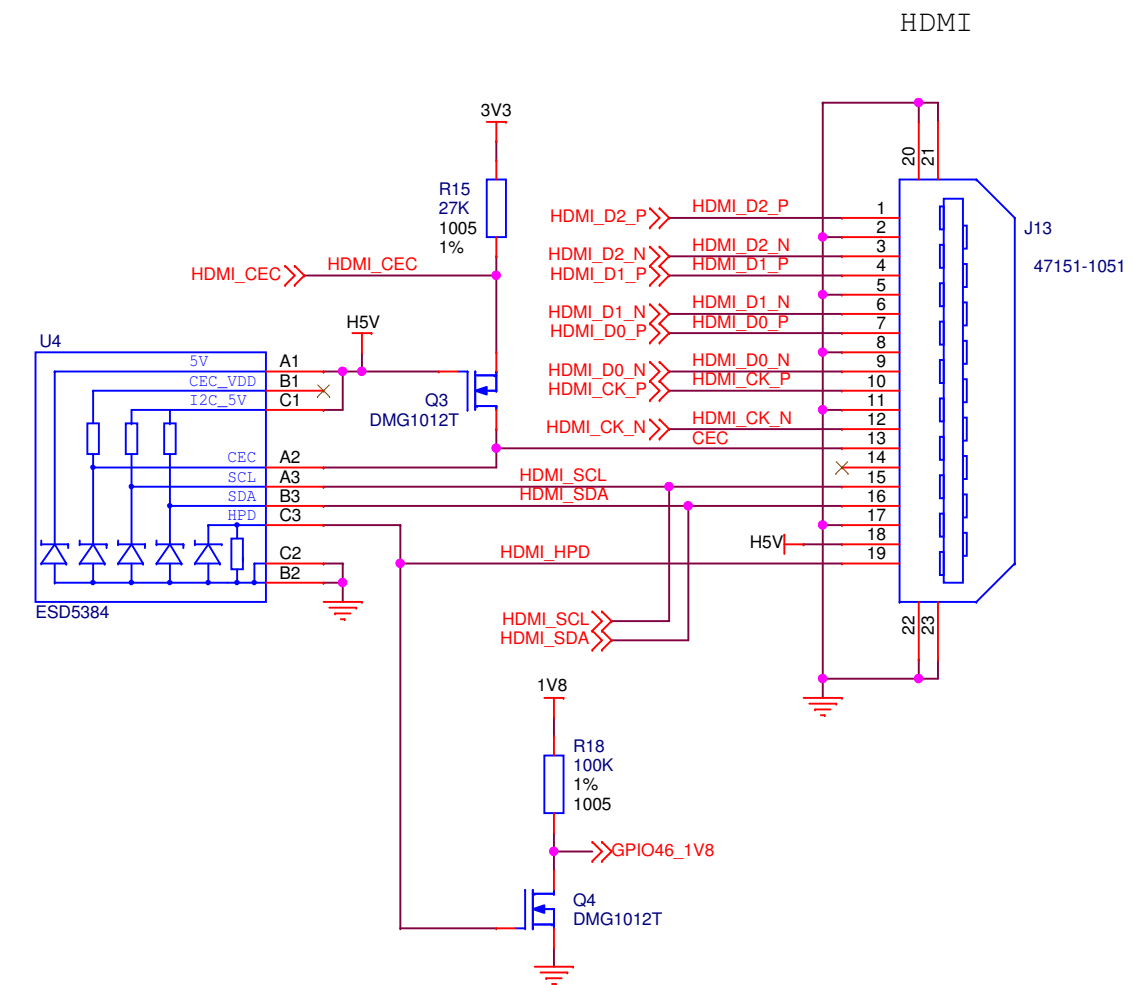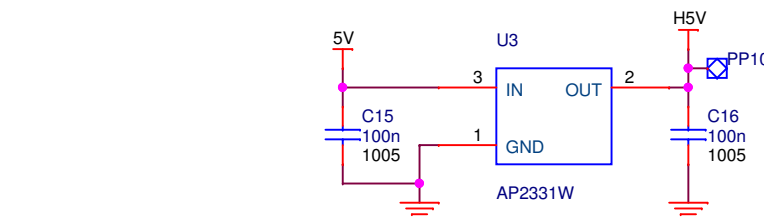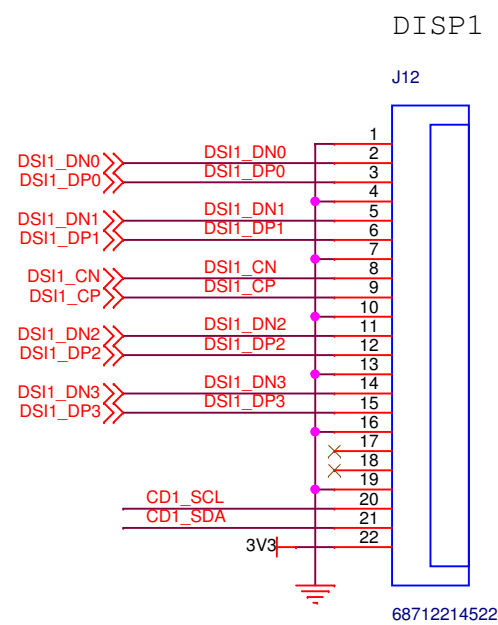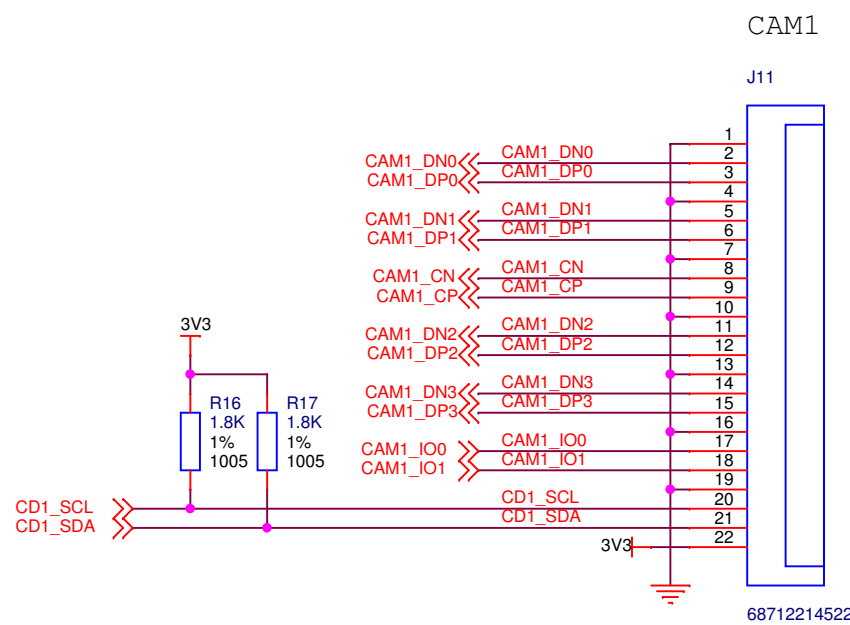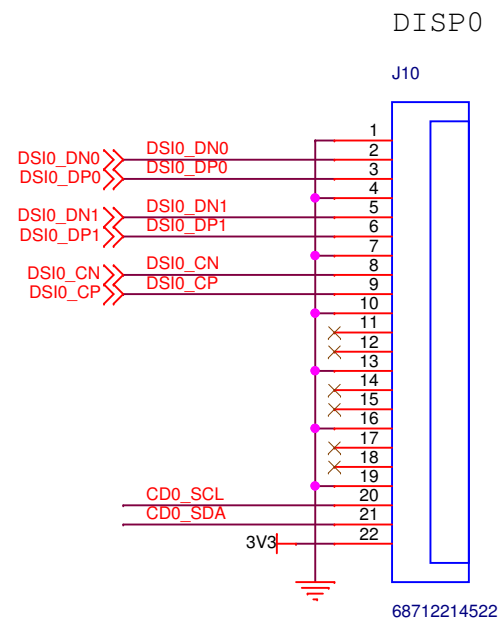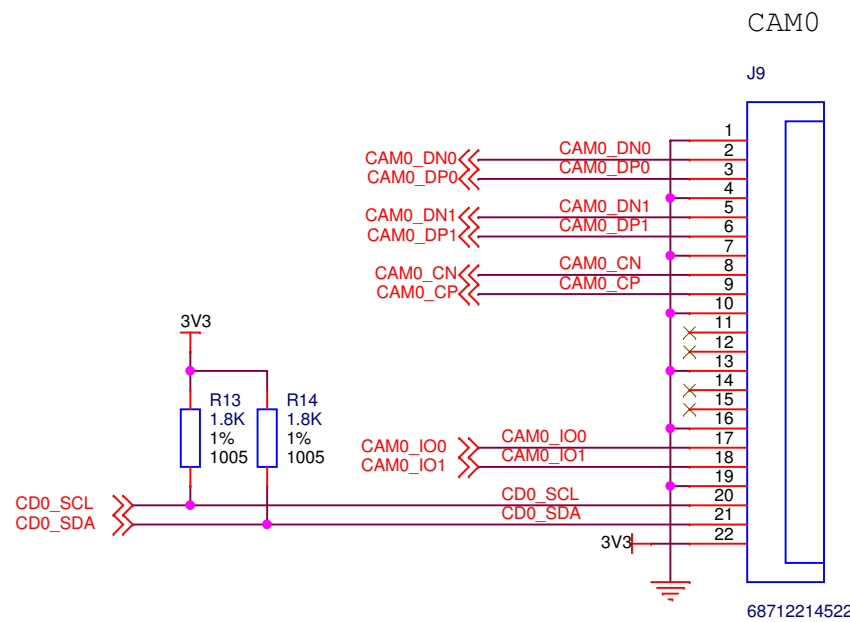

Raspberry Pi

© Raspberry Pi 2014
www.raspberrypi.org

Title		Drawn By	
Raspberry Pi Compute Module IO Board		James Adams	
Size	Ref	Rev	
A2	RPI-CMIO	1.2	
Date:		Sheet	
Thursday, April 03, 2014		3 of 3	